

PROTECTION

DEMINING APRON DA2

Demining apron for protection
against anti-personnel landmines



DEMINING APRON DA2

Demining apron for protection against anti-personnel landmines

The Demining Apron DA2 is an Apron with a protection according to STANAG 2920 that serves to protect against anti-personnel mines. It is characterized by two collars. The two collars significantly increase the protection of the visor as they are designed to stop the blast from penetrating. Frontal protection is provided from the shoulders to the lower leg respectively knee area. It can be used in both a kneeling and a lying position without any modification. The open back for ventilation as well as the light weight make it comfortable to wear. It is put on and taken off in a few seconds.

A removable, washable cover is designed to outlast the life of the armor. It is coated with water-resistant polyurethane.

- ✓ Protection level v50 = 450 m/s (1476 ft/s) according to STANAG 2920, fulfills IMAS 10.30
- ✓ Comfortable to wear for all genders
- ✓ Suitable for operations in tropical areas
- ✓ Quickly donned and individually adjusted
- ✓ High degree of freedom of movement in all positions with a full field of vision
- ✓ High durable and hygienic due to washable outer cover



Black

Coyote brown



Dark blue

Dark blue

Olive

ENSURING SAFETY AND COMFORT

for demining operations

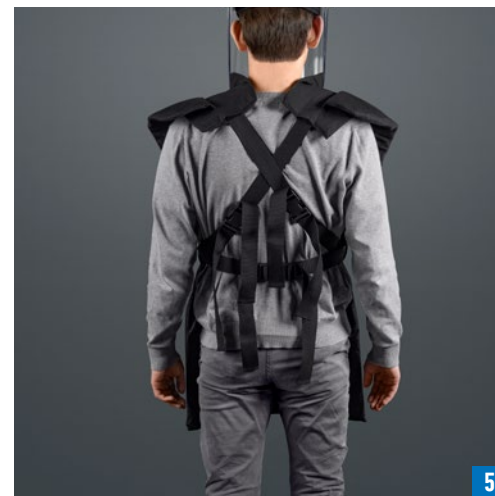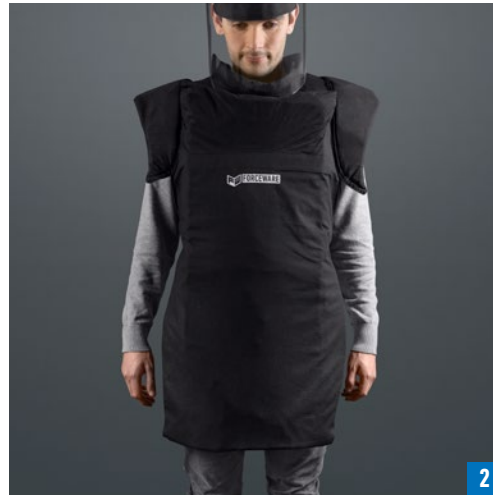

- 1 The Demining Visor DV5 is an optional accessory that perfectly complements the Demining Apron DA2
- 2 High durable and washable Cordura® outer cover
- 3 The Deflector efficiently deflects the blast wave to prevent any expansion under the visor
- 4 Comfortable to wear for all genders, suitable for operations in tropical areas
- 5 Our product offers the ability to individually adjust the size to fit the body's anatomy

DATA SHEET

DEMINEING APRON DA2

TECHNICAL DATA

Article number	1020032
Sizes	One size fits it all
Colors	Black, dark blue, un blue, olive, coyote brown
Weight	Approx. 3.92 kg (8.64 lbs)
Protection	v50 = 450 m/s (1476 ft/s) according to STANAG 2920, fulfills IMAS 10.30
Warranty cover	12 months against labor faults
Warranty ballistics	5 years

